


### Step 1





To loose one (1) dial Hex. screw.  
 首先，將固定刻度盤的螺絲鬆開，  
 並將刻度盤往上拿起。

### Step 2

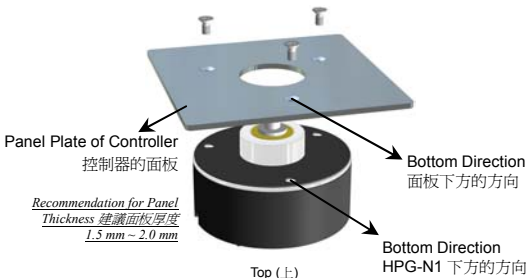


[ cutting of panel ]  
 面板開孔尺寸及方向

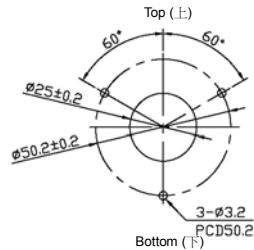

Target the bottom set screw position to be matched with Panel Plate bottom direction.

依左圖示及面板開孔尺寸配置固定安裝 HPG-N1。


### Step 3

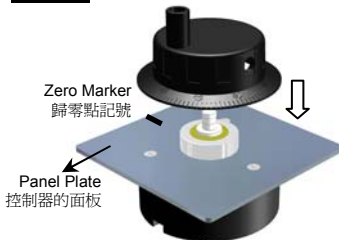

Align the zero point dial and Panel Plate Zero Maker.

將刻度盤放回轉動機構。  
 並將刻度盤上的刻度「0」與控制器面板上預設的歸零點記號對齊。

### Step 4

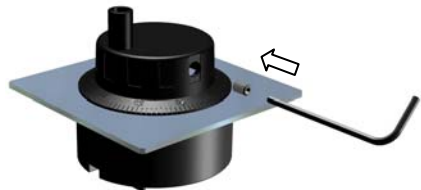

Then set and tighten one (1) dial Hex. screw.

用原螺絲固定刻度盤。

### Accessories 配件包



M3 mounting screws (3) (for **Step 2**)  
 附 M3 固定螺絲 3 個